

K-LINE

K109UI

DC Current / Voltage Converter

K-LINE


Converters-analog isolators



- ▶ INPUT: N.1 channel current 0/4..20 mA or voltage 0/1..5, 0/2..10, 0..15/30 Vdc
- ▶ OUTPUT: N.1 channel current 0/4..20, 20..4/0 mA or voltage 0/1..5, 0..10, 10..0 Vdc
- ▶ Galvanic isolation at 3-way
- ▶ Spring-cage terminal block and/or DIN bus connection system
- ▶ Power bridging terminal - DIN rail bus connector
- ▶ Tiny dimensions (102,5 x 93,1 x 6,2 mm)
- ▶ Resolution @ 14 bit
- ▶ Precision class 0.1%

TECHNICAL DATA

K109UI – DC Current / Voltage Converter

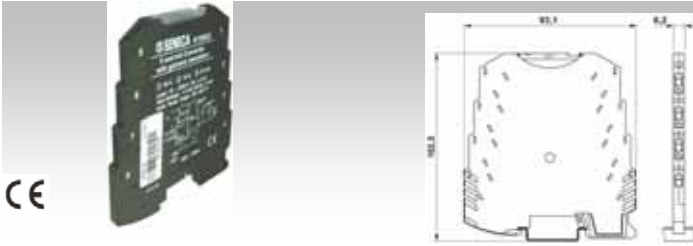

ORDER CODES

K109UI DC Current / Voltage Converter

Accessories

K-BUS Expandable power supply connector

K-SUPPLY Power Supply module with surge protection

GENERAL FEATURES

Power supply	19,2...30 Vdc
Channels	N.1
Accuracy	0.08% of the f.s. value for mA or 5 V output 0.07% of the f.s. value for 10 V output
Status indicators	Input or output out-of-range limiter device triggered Input saturation Internal fault
Galvanic Isolation	Power supply // input // output at 1500 Vac, digital
Hot swapping	Yes
Power consumption	500 mW
A/D Converter	14 bit
Current output protection	Approximately 25 mA
Security output	- 102.5% of full scale value, in case of over-range - 105% of full scale value in case of improper functioning
Humidity	30..90% a +40°C (not condensing)

Design	Terminal housing for mounting on 35 mm DIN 46277
Filter rejection	50-60 Hz (settable)
DIP Switch	-Inputs signal setup -Output signal setup
Processing	Floating point 32 bit
Dimensions	6,2 x 93,1 x 102,5 mm (w x h x d)
Weight	50 g
Operating temperature	-20...+65 °C
Connections	Plug-in screw clamp terminal blocks, wires up to 2.5 mm ²
IP Protection	IP 20
Standards	EN50081-2 EN50082-2 EN61010-1 EN60742
Approvals	CE

INPUT


Type	Voltage (max. 50 V) : 0..15 V, 0..30 V, Input impedance: 325 kOhm 0..10 V, 2..10 V, 0..5 V, 1..5 V, Input Impedance: 110 kOhm Current (max. 24 V) : 0..20 mA, 4..20 mA, Input Impedance: 35 Ohm
------	--

OUTPUT


Type	Voltage : 0..5 Vdc, 1..5 Vdc, 0..10 Vdc and 10..0 Vdc Lower load resistance: 2 kOhm Current : 0..20 mA, 4..20 mA, 20..0 mA e 20..4 mA Higher load resistance: 500Ohm
------	---

DIMENSIONS AND INSTALLATION


Inserting / Extracting module on DIN guide

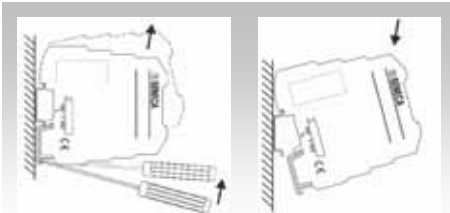


Expandable connector K-BUS

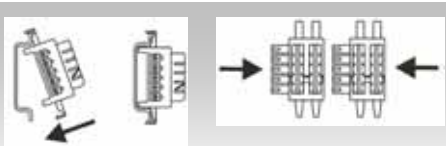


Cage clamp connection

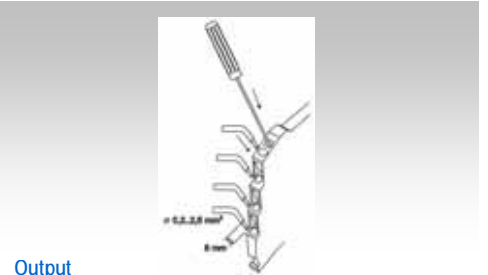

Power supply



Input

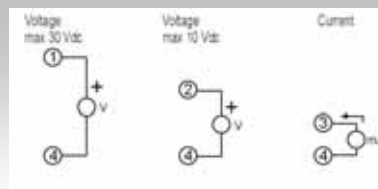

Output

